


ARMO ASOLA SPACERS

Armo Asola 3.2

- Our ARMO ASOLA spacers are made to be used not only in their size, but, if necessary, the same spacer can be used for different undersize dimensions (see attachment).
- Another advantage is that when the spacer is covered by concrete the holes do not allow air bubbles to form underneath allowing the concrete to completely fill the formwork.
- Dimensions and load capacities are guaranteed by checks made with the FEM module and supported by transformation certification and chemical analysis certification of the material's origin.
- The package is flat and rigid in a heat-shrunk nylon film.

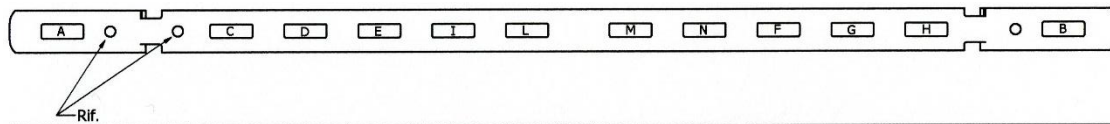


Combinazioni possibili Armo Asola 15 - 60																					
asola "A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"I"	"L"	"M"	"N"	Armo da 15	Armo da 20	Armo da 25	Armo da 30	Armo da 35	Armo da 40	Armo da 45	Armo da 50	Armo da 55	Armo da 60
X	X											15	20	25	30	35	40	45	50	55	60
	X	X										7	12	17	22	27	32	37	42	47	52
	X		X									-	8.5	13.5	18.5	23.5	28.5	33.5	38.5	43.5	48.5
	X			X								-	-	10	15	20	25	30	35	40	45
X					X							8.5	13.5	11.5	16.5	21.5	26.5	31.5	36.5	41.5	46.5
X						X						-	-	15	20	25	30	35	40	45	50
X							X					-	-	18.5	23.5	28.5	33.5	38.5	43.5	48.5	53.5
X										X		-	-	-			19.5	24.5	29.5	34.5	39.5
X											X	-	-	-	13	18	23	28	33	38	43
	X							X				-	-	-	-	16.5	21.5	26.5	31.5	36.5	41.5
	X								X			-	-	-	-	-	18	3	28	33	38

RECOMMENDED SPACER CENTER MEASUREMENTS FE

This table is indicative, the measurement of the spacing of the spacers and the task of the site safety officer, in the event of a very fluid concrete casting and in the winter season, reduce the spacing by 10%


Spacer lenght	Height of the pour	Recommended wheelbase
Cm 10-20	Cm 200-300	Cm 25
Cm 10-20	Cm 300-400	Cm 20
Cm 25-40	Cm 200-300	Cm 30
Cm 25-40	Cm 300-400	Cm 25
Cm 45-140	Cm 200-400	Cm 30

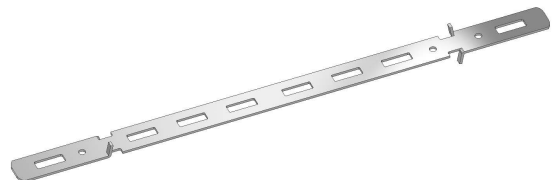

PACKAGING AND STORAGE:

To give a complete customer service our spacers are packed flat, rigid in a shrink film (for easy control and easy handling).

Labeled with recommended installation instructions (see photo below).

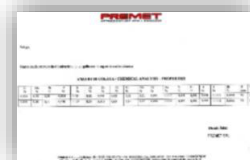

Certificate of chemical analysis of the material



Transformation certificate.

THE ARMO ASOLA SPACER IS A PREMET PRODUCT